

# INLU85SEMPACK

## 85cm Undermount Rangehood With External Motor

**Euromaid**  
*made for you.*



### Features

Stainless Steel Undermount Rangehood

1300 m<sup>3</sup>/h Air Extraction

Remote External Motor For Quiet Operation

Push Button Controls

3 x Fan Speeds

Strip LED Lighting

2 x Baffle Filters

2 Year Warranty

### Specifications

Airflow:	1300 m <sup>3</sup> /h
Motor Housing:	316 Marine Grade Stainless
Noise Level:	62 dBA <sup>▲</sup>
Lighting:	7W LED Strip
Total Wattage:	327W with Motor
Ducting Spigot Size:	200mm
Models In Pack:	INLU85S + INLEM3
Accessories Included:	6 Metre Flexi-Duct
Cabinet Size Required:	900mm

<sup>▲</sup> dBA value provided is as a result of the measurement taken during the rangehood operating on full speed.



Note: dBA level is dependant on installation scenario and length of ducting run.



# INLU85SEMPACK

## 85cm Undermount Rangehood With External Motor

**Euromaid**  
*made for you.*

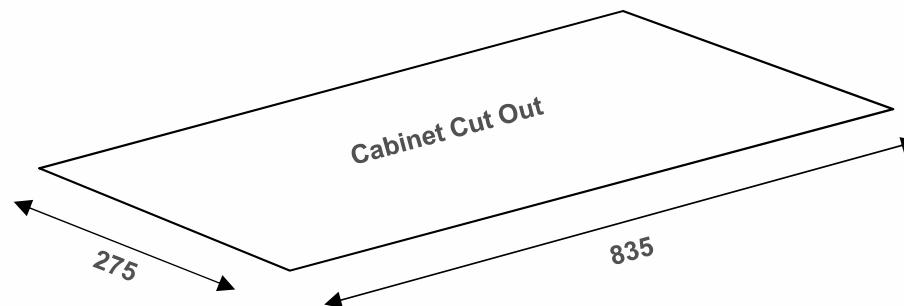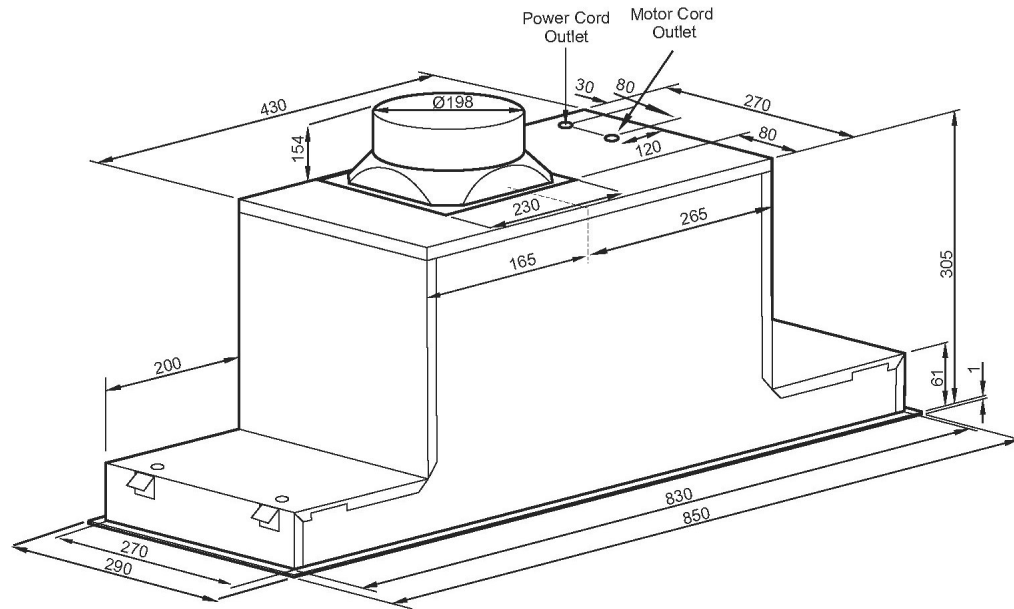

### Product Dimensions

850mm (W) x 305mm (H) x 290mm (D)

### Cut Out Dimensions\*

835mm (W) x 275mm (D)

- Ensure the distance between the edges of the cut-out to the edge of the cupboard is at least 35mm

### Total Power

Power: 327W, 220 - 240 volt / 50Hz

Connection: 10amp, 3 Pin Plug

